


Werkstattinformationssystem Display Document

Sales designation: 300 TE	Vehicle ident. number: WDB124090*	Engine number: 103.983	Automatic transmission: 722320	Gr.: 54.30	Entry: Mod.Y.: Op.no.:
RA54.00-1-2460-15X	6015 - Removal and installation of the instrument cluster			Full-size view	validity OFF Page: 7 / 11

B. Assignment of 15-pin couplings of instrument cluster

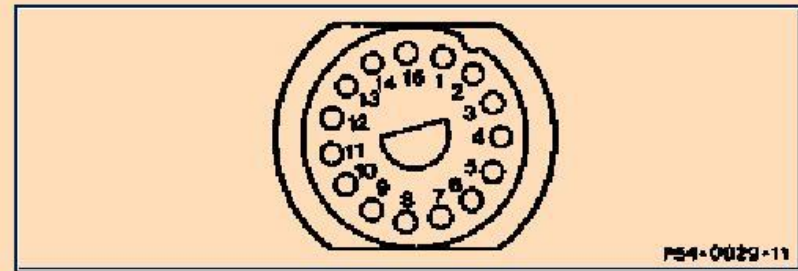

PS4-0029-11

Assignment of 15-pin coupling (half-round shape to prevent incorrect connection)

No.	Designation	Cable cross-section	Colour code
1	Ground W1	0.5	brown

Add. Functions	Document Functions	What is new?	Document: 1 / 1	Level: 1	Menu	Help	Previous Screen
----------------	--------------------	--------------	-----------------	----------	------	------	-----------------

RA54.00-1-2460-15X 6015 - Removal and installation of the instrument cluster Normal view validity OFF Page: 6 / 8

Assignment of 15-pin coupling (half-round shape to prevent incorrect connection)


No.	Designation	Cable cross-section	Colour code
1	Ground W1	0.5	brown
2	Coolant temperature sensor	0.5	green
3	Fuel gauge sensor	0.5	blue/black
4	Fuel reserve gauge sensor	0.5	blue/green
5	Oil level indicator switch	0.5	brown/black
6	Fuse 5 terminal 15	0.75	black/red violet
7	Main beam indicator lamp	0.5	white
8	Fuse 6 terminal 15 unfused	0.5	pink/red
9	Charge indicator lamp terminal 61	0.5	blue
10	Left front brake pad wear indicator contact sensor	0.5	brown/red
10	Right front brake pad wear indicator contact sensor	0.5	brown/red
10	Rear brake pad wear indicator contact sensor (only with ASR)	0.75	brown/red
11	Brake fluid level indicator switch	0.5	brown/white
12	Coolant level indicator switch	0.5	brown/yellow
13	Lamp failure monitoring unit terminal K	0.5	grey/violet

Start wis Fuel gau... << 00:09

wis RA54.00-1-2460-15X 6015 - Removal and installation of the instrument cluster Normal view validity OFF Page: 7/ 8


12	Coolant level indicator switch	0.5	brown/yellow
13	Lamp failure monitoring unit terminal K	0.5	grey/violet
13	Ashtray illumination	0.5	grey/violet
14	Left turnsignal indicator lamp	0.5	black/white
15	Right turnsignal indicator lamp	0.5	black/green

C. Assignment of 4-pin coupling of instrument cluster

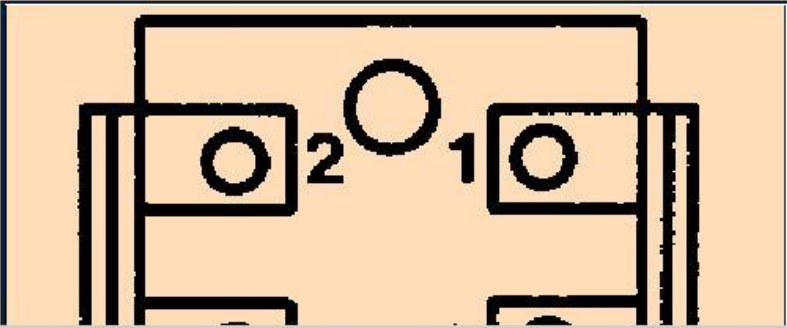

The diagram shows a 4-pin coupling connector. It consists of two rectangular housings, one on the left and one on the right. Each housing has two circular terminals. The terminal on the right housing is labeled '1', and the terminal on the left housing is labeled '2'. A line connects the two housings at the top, and another line connects them at the bottom, forming a rectangular frame around the terminals.

Start wis Fuel gau... << 00:11

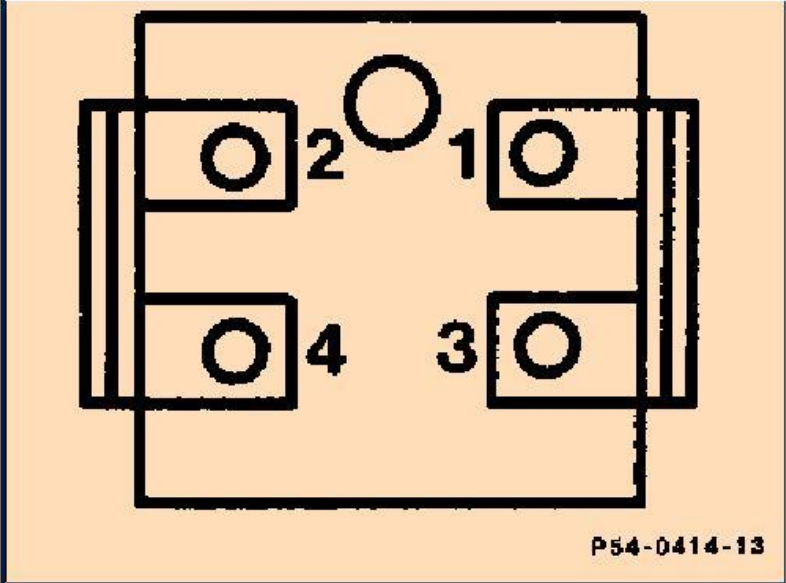

No.	Designation	Cable cross-section	Colour code
1	Windshield washer system level indicator switch	0.75	brown/blue
2	Terminal block terminal 58d	0.75	grey/blue
3	Warning buzzer contact (USA not assigned)	0.75	brown/yellow
4	Oil pressure gauge sensor	0.75	brown/green